




FIBERGLASS SAND FILTER

SIDE MOUNT

Features :

Side mount sand filters are built to be tougher, longer lasting and better performing. Constructed of polyester resin and non-corrosive fiberglass filament winding, all internal components and connection are injection molded PVC. They produce more filtered water with less pumps horsepower. UV-resistance surface allows working under sunshine. Easy-to-use six-position valve makes you select any of the valve/filter operation in a proper way.

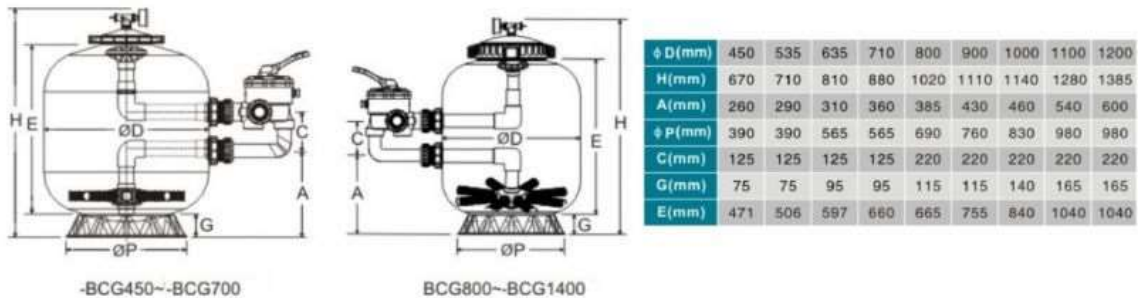

MODEL	DESCRIPTION	M/V	FLOW RATE	FILTER AREA	0.5-0.8 MM. SAND WEIGHT	1-2 M. SAND WEIGHT
BS-BCG450	18" HI-RATE SAND FILTER WITH M/V	1-1/2"	7.98M3/HR	0.16	50 KG.	25 KG.
BS-BCG500	20" HI-RATE SAND FILTER WITH M/V	1-1/2"	10M3/HR	0.23	80 KG.	40 KG.
BS-BCG650	26" HI-RATE SAND FILTER WITH M/V	1-1/2"	14M3/HR	0.32	160 KG.	80 KG.
BS-BCG700	28" HI-RATE SAND FILTER WITH M/V	1-1/2"	16.20M3/HR	0.40	220 KG.	110 KG.
BS-BCG800	32" HI-RATE SAND FILTER WITH M/V	2"	25.20M3/HR	0.50	380 KG.	190 KG.
BS-BCG900	36" HI-RATE SAND FILTER WITH M/V	2"	30M3/HR	0.64	453 KG.	227 KG.
BS-BCG1000	40" HI-RATE SAND FILTER WITH M/V	2"	33M3/HR	0.79	712 KG.	356 KG.
BS-BCG1200	48" HI-RATE SAND FILTER WITH M/V	2"	42M3/HR	1.13	1220 KG.	610 KG.