




WITHOUT STRAINER

**Product features :**

Thermal protector : single phase

Insulation : F

Protection : IP55

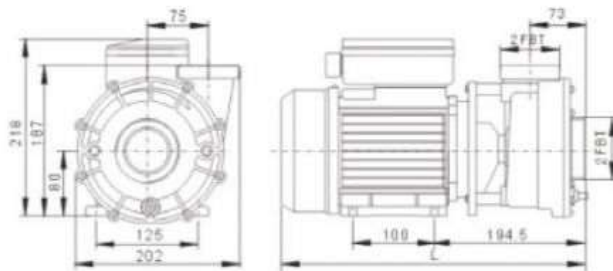


**Working conditions :**

Medium temperature : 5~50°C

Environmental temperature : ≤50°C

Max.working pressure : 0.3MPa

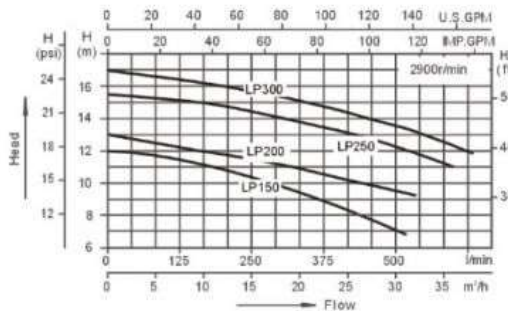

MODEL	DESCRIPTION	VOLTAGE/HZ	KG.	PACKING SIZE
BS-LP 150	1.5 HP SPA PUMP	220V/50HZ	12	420 X 235 X 280
BS-LP 200	2 HP SPA PUMP	220V/50HZ	12.7	420 X 235 X 280
BS-LP 250	2.5 HP SPA PUMP	220V/50HZ.	14.6	420 X 235 X 280
BS-LP 300	3 HP SPA PUMP	220V/50HZ	16.3	435 X 235 X 280