

HEATING SYSTEMS



“EMAUX” B2 Series Heat Pump

Product Features


- Durable** The heating exchanger is made by PVC & Titanium tube, which can withstand prolonged exposure to swimming pool water.
- Easy Operation** The heating exchanger is made by PVC & Titanium tube, which can withstand prolonged exposure to swimming pool water.
- Quiet Operation** The unit comprises an efficient rotary compressor and a low-noise fan motor, which guarantees its quiet operation.
- Low Cost** The operational cost is very low due to its high performance



Measuring Conditions


Heating : Dry bulb 24°C, Wet Bulb 19°C, Water entering temperature 27°C

Model	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)
HP4.5B2	260	293	754	770	100	260	460	485
HP5.6B2	280	360	936	950	110	250	520	550
HP7.8B2	280	360	936	950	110	250	520	550
HP9.5B2	300	370	1010	1085	110	270	580	615

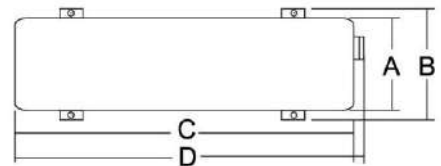

Product Information

Model	Net Dimensions L x W x H (mm)	Packing Dimensions L x W x H (mm)	Net Weight (kg)	Gross Weight (kg)
HP4.5B2	754 x 293 x 485	760 x 295 x 490	36	39
HP5.6B2	936 x 360 x 550	1090 x 390 x 580	39	42
HP7.8B2	936 x 360 x 550	1090 x 390 x 580	54	57
HP9.5B2	1010 x 370 x 615	1170 x 415 x 645	63	67

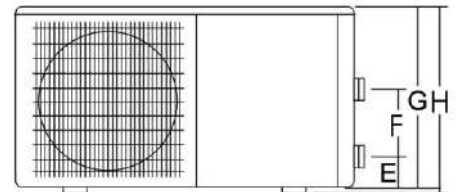

Model	Heating Capacity in A27°C/W27°C (W)	Heating Capacity in A15°C/W26°C (W)	Rated Heating Capacity (W/BTU)	Heating Input Power (W)	Heating Running Current (A)	Power Supply (V/PH/Hz)
HP4.5B2	5500	4000	4500/15300	1050	4.8	220V/1PH/50Hz
HP5.6B2	6200	4500	5600/18000	1250	5.7	220V/1PH/50Hz
HP7.8B2	8900	6100	7800/26500	1650	7.5	220V/1PH/50Hz
HP9.5B2	11500	8200	9500/32500	1978	10	220V/1PH/50Hz

Code	Model	BTU	Voltage	Phase	Frequency (Hz)
21700510005	HP4.5B2*	15300	220	1	50
21700510010	HP5.6B2*	18000	220	1	50
21700510015	HP7.8B2*	26500	220	1	50
21700510020	HP9.5B2*	32500	220	1	50

* สินค้าไม่มีสต็อก กรุณาลังล่วงหน้า 60-90 วัน / No Stock, Delivery Time 60-90 Days