





“EMAUX” Butterfly Valve Systems For Commercial Sand Filters



FEATURES

1. Made with anti-corrosive material
2. Applies with flange design which enables easy installation and disassembly
3. Suitable for commercial heavy duty usage.

5 Way Butterfly Valve

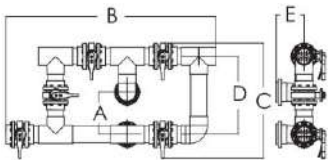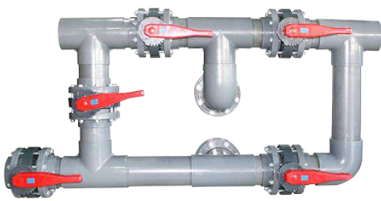

5 Way Butterfly Valve NBV30-NBV80

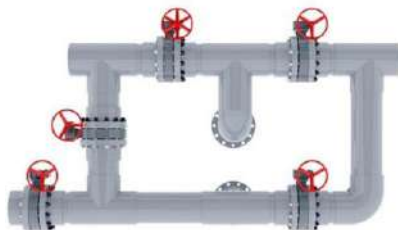

5 Way Butterfly Valve BVGT100- BVGT120

Tank Material

Anti-Corrosive

Max Working Pressure

250kPa/36psi/2.5bar

Factory Testing Pressure

400kPa/58psi/4.0bar

Max Temperature

40°C (109°F)

Product Information

Model	Valve Connection		A (mm)	B (mm)	C (mm)	D (mm)	E (mm)
	GB(mm)	ANSI					
NBV30-5	90	3"	350	1395	889	552	172
NBV40-5	110	4"	350	1521	963	614	210
NBV60-5	160	6"	415	2039	1228	775	287
NBV80-5	200	8"	550	2832	1500	1015	376
BVGT100-5	250	10"	710	3374	1913	1286	472
BVGT120-5	315	12"	710	3692	2106	1423	552



Code	Model	Description	Size
2350333900	NBV30-5 *	5-Way Valve System In/Outlet Butterfly Valve	3"
22100510040	NBV40-5 *		4"
22100510045	NBV60-5 *		6"
22100510050	NBV80-5 *		8"
22100510055	BVGT100-5 *		10"
22100510060	BVGT120-5 *		12"

* สินค้าไม่มีสต็อก กรุณาสั่งซื้อล่วงหน้า / No Stock, Delivery Time : 60 - 90 Days