

FILTRATION SYSTEMS



“EMAUX” FSF Series Sand Filtration Systems Complete Set With Pump & Based

STANDARD FEATURES

- Suggested Installation : Domestic swimming pool
- Easy Installation with pre-installed plumbing system & base
- Simple operation with 6-way multiport valve
- Filter structure with UV resistance material

Valve



6-Way Multiport Valve

Max Water Temperature

43°C (109°F)

Max Working Pressure

36psi/2.5bar

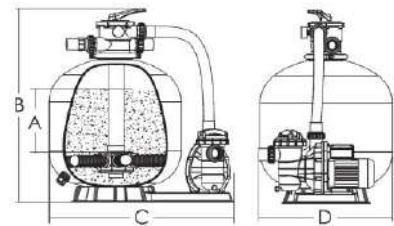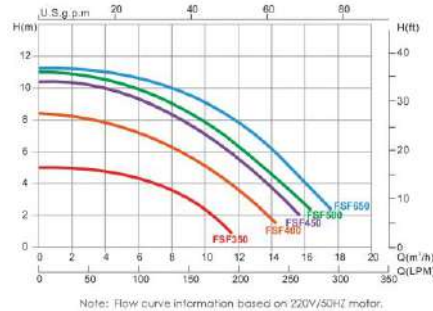

Product Information and Dimensions

Note: Suggested sand weight varies with the differences in filter media size. For reference only.

Model	Filter	Pump	Valve Connections	Sand (kg)	A (mm)	B (mm)	C (mm)	D (mm)	Max. Flow Rate
FSF350-6W	V350	SS033	1.5" / 50mm	20	160	680	555	355	72lpm 4.32m ³ /h
FSF400-6W	V400	SS050	1.5" / 50mm	35	175	759	760	410	108lpm 6.48m ³ /h
FSF450-6W	V450	SS075	1.5" / 50mm	45	210	813	760	455	135lpm 8.10m ³ /h
FSF500-6W	V500	SC100	1.5" / 50mm	85	235	856	760	535	185lpm 11.10m ³ /h
FSF650-6W	V650	SC150	1.5" / 50mm	145	300	961	760	635	260lpm 15.60m ³ /h

Code	Model	MV (inches)	Flowrate (m ³ /h)	Height (cm)	Width (inches)	Sand (50kgs/bag)	Zelbrite (15kgs/bag)	EcoClear (25kgs/bag)		Pump
								Coare	Fine	
20310510255	FSF350-6W	1.5	4.31	72.60	14	1 (20kgs)	1	1/2	1	SS033
20310510260	FSF400-6W	1.5	6.48	75.70	16	1 (35kgs)	2	1/2	1	SS050
20310510265	FSF450-6W	1.5	8.10	81.40	18	1 (45kgs)	3	1/2	1	SS075
20310510270	FSF500-6W	1.5	11.10	84.50	21	2 (85kgs)	5	1	2	SC100
20310510275	FSF650-6W	1.5	15.60	95.00	25	3 (145kgs)	8	1	3	SC150