


"Suitable for residential pool  
and 70°C hot spring water"

### FEATURES:


- IP55 waterproof standard
- Ultra Quiet.
- Maximum working pressure up to 6kg/cm<sup>2</sup>
- Tailor-made impeller and mechanical seal, suitable for long time use
- Internal innovative design with big suction power
- Simple design basket, easy to take out and install
- Come with standard DN40 unions easy to install.
- Suitable for maximum hot water temperature up to 70°C

Appearance and design patented, counterfeiting not allowed!

### PUMP PERFORMANCE CURVE :

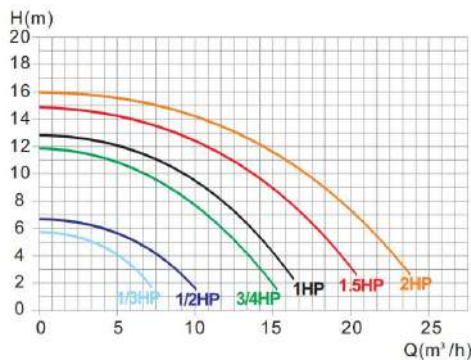

### PUMP DIMENSION :

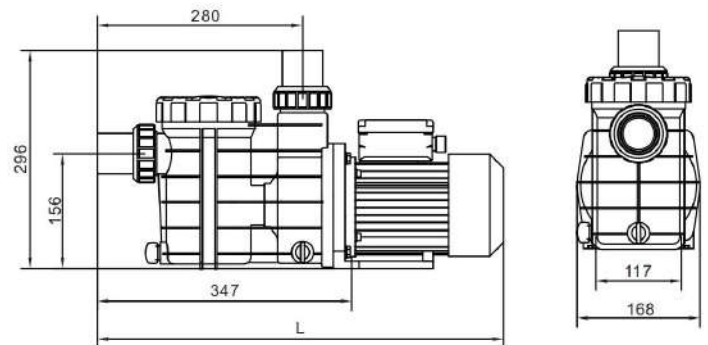

### SPECIFICATION AND SIZE :

Model	Voltage	Power		Inlet/Outlet	Hmax	Qmax	Length	Width	Height
	(V)	KW	HP		(M)	(m³/h)			
ABS-030	220V/50Hz	0.25	1/3	DN40	6	7	500	168	245
ABS-050	220V/50Hz	0.37	1/2	DN40	7	10	500	168	245
ABS-075	220V/50Hz	0.55	3/4	DN40	12	15	500	168	245
ABS-100	220V/50Hz	0.75	1	DN40	13	16	500	168	245
ABS-150	220V/50Hz	1.1	1 1/2	DN40	15	20	500	168	245

### MONA-ABS PUMP

> เหมาะสำหรับสระว่ายน้ำขนาดเล็ก-ขนาดกลาง และสระสปา ทำงานเรียบ ทนอุณหภูมิได้ สูงถึง 70°C

MODEL	DESCRIPTION	PIPING	FLOWRATE*	@HEAD
x ABS030	0.3HP/220V	1.5"	5 m <sup>3</sup> /Hr	4 m.
x ABS050	0.5 HP/220V	1.5"	7.5 m <sup>3</sup> /Hr	4 m.
ABS075	0.75 HP/220V	1.5"	12.5 m <sup>3</sup> /Hr	5 m.
ABS100	1 HP/220V	1.5"	9.16 m <sup>3</sup> /Hr	10 m.
ABS150	1.5 HP/220V	1.5"	13.96 m <sup>3</sup> /Hr	10 m.

x Pre-order 45-90 days

### การรับประกันสินค้า

ราคาดังกล่าวเป็นราคาที่ยังไม่รวมภาษีมูลค่าเพิ่ม

รับประกันอะไหล่ทุกชิ้นส่วน 1 ปี (ตามเงื่อนไขที่บริษัทฯกำหนด)

