



“PRAHER” Aquastar Easy II Series Automatic Multiport Valve

FEATURES


- Valve body in ABS
- 100-240 VAC or 150-300 VDC
- Protection class IP65
- UV-resistant
- Emergency handle
- Pressure sensor for permanent monitoring or Time Controller
- Winter position for protection of valve gaskets
- Optical position indicator



TECHNICAL DATAS

Aquastar	
Voltage:	24 V AC/DC
Protection:	IP 65
Frequency:	50/60 Hz /DC
Rated operating current:	100mA at 230V AC 200mA at 110V AC
Max. Power:	20VA
Environmental conditions:	0-40°C, 0-95%RH not condensing
Max static pressure:	0,3 Bar
Max water column:	3 m
Relais Pumpe:	8A at cosp=1
Relais Kugelhahn:	8A at cosp=1
Multifunktionsrelais:	3A at cosp=1
Possible positions of Aquastar EasyII	Filter, Backwash, Rinse, Recirculate, Waste

Praher Plastics 6-Way Valve	
Body material:	1,5" – 2" ABS / ASA-GF 3" ASA-GF
Seals:	TPE + NBR
Operating pressure:	1,5" – 2" ABS: 3,5 Bar (20°C) ASA-GF: 6,5 Bar (20°C)
Maximum pressure when the valve plate is lifting	0,3 Bar
The Aquastar easyII is fully assembled only available in combination with an SM-valve. But it can also be mounted on TM-valves.	

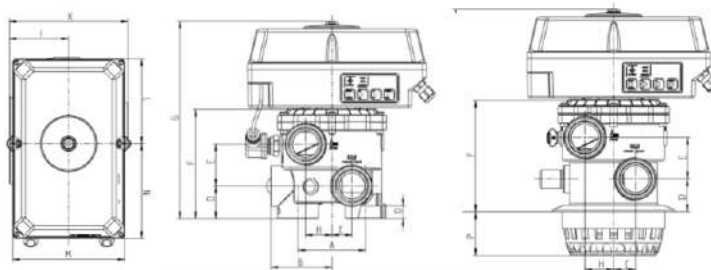

	1 ½" SM	1 1/2" TM	2" SM
A	99,5	X	110
B	90	X	114
C	29,5	31,5	38
D	48	47	60
E	61,5	59,5	81
F	163,5	160	210
G	295	291	339
H	39	42,5	36
I	87,5	90	114
K	175	180	228
L	125	125	125
M	165	165	165
N	140	140	140
O	18,5	18,5	26
P	X	62,5	X

Dimensionen in mm

Code	Model	Type	Size	Description
20611600070	AquaStar Easy II-1.5 [*]	Side Mount	1.5"	Automatic multiport valve
20611600075	AquaStar Easy II-2 [*]	Side Mount	2"	

^{*} สินค้าไม่มีสต็อก กรุณาสั่งซื้อล่วงหน้า / No Stock, Delivery Time : 60 - 90 Days